

FK95-9225.230

FK95.300



IP54

CE

RoHS

-20 +65

规格

风扇过滤器型号	FK95-9225.230	FK95-9225.115	FK95-9225.024
额定电压	200V-240V AC	100V-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	-
空气流量, 自由吹风	28/38m³/h	28/38m³/h	38m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK95.300: 20/25m³/h		
轴流风机	自启动罩极电机		
额定电流	0.07A/0.06A	0.12A/0.11A	0.08A
功率	12/11W	12/11W	1.98W
噪音水平	37/41dB(A)	32/35dB(A)	35dB(A)
过滤器工作范围	-20°C - +65°C	-20°C - +65°C	-20°C - +65°C
出口过滤器型号	FK95.300	FK95.300	FK95.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



全新设计的固定架
更好的 IP 等级






易开式结构,
滤芯维护更快捷



通过螺母灵活调整风扇尺寸

尺寸图(mm) 可选风扇尺寸: 92x92mm



FK122-12038.230

FK122.300



IP54

CE

RoHS

-20 ~ +65

规格


风扇过滤器型号	FK122-12038.230	FK122-12038.115	FK122-12038.024
额定电压	200V-240V AC	100V-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	-
空气流量, 自由吹风	65/85m³/h	65/85m³/h	100m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK122.300: 55/70m³/h		
轴流风机	自启动罩极电机		
额定电流	0.12A/0.11A	0.24A/0.22A	0.2A
功率	19/18W	19/18W	4.8W
噪音水平	41/42dB(A)	41/42dB(A)	41dB(A)
过滤器工作范围	-20°C ~ +65°C	-20°C ~ +65°C	-20°C ~ +65°C
出口过滤器型号	FK122.300	FK122.300	FK122.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		


 全新设计的固定架
更好的 IP 等级

 易开式结构,
滤芯维护更快捷


通过螺母灵活调整风扇尺寸

尺寸图(mm) 可选风扇尺寸: 120 x 120mm

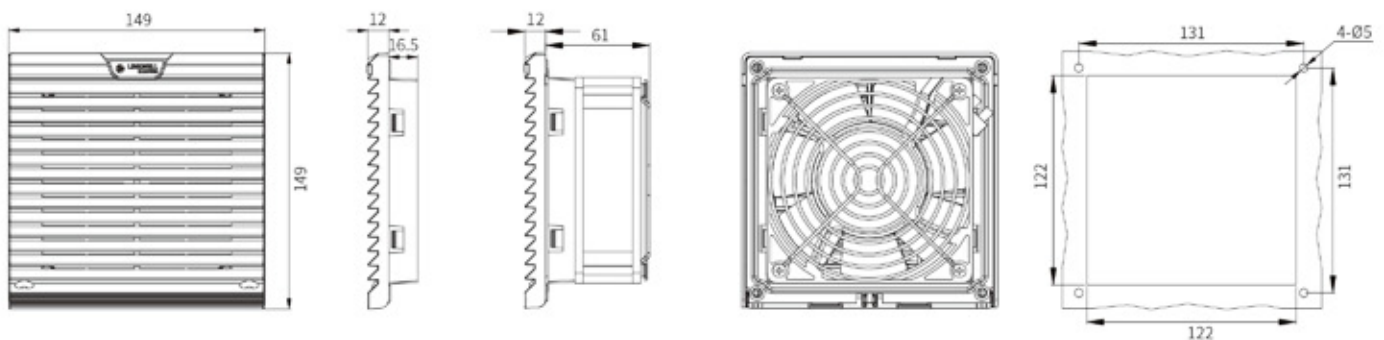

FK175-17251.230

FK175.300



IP54

CE

RoHS

-20 ~ +55

规格

风扇过滤器型号	FK175-17251.230	FK175-17251.115	FK175-17251.024
额定电压	200V-240V AC	100V-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	198/218m³/h	198/218m³/h	270m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK175.300: 139/167m³/h		
轴流风机	自启动罩极电机		
额定电流	0.24A/0.22A	0.45A/0.52A	0.50A
功率	38/36W	38/36W	12W
噪音水平	50/52dB(A)	50/52dB(A)	50dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK175.300	FK175.300	FK175.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



全新设计的固定架
更好的 IP 等级





易开式结构,
滤芯维护更快捷



通过螺母灵活调整风扇尺寸

尺寸图(mm) 可选风扇尺寸: 120x120/150x150/172x150mm

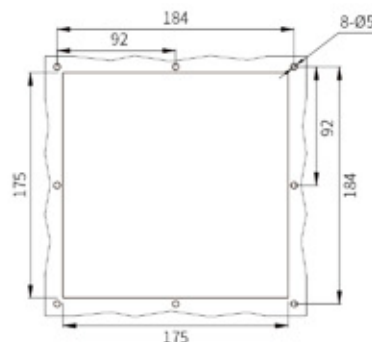



FK223-22060.230

FK223.300



IP54

CE

RoHS

-20 ~ +65

规格



风扇过滤器型号	FK223-22060.230	FK223-22060.115	FK223-22060.024
额定电压	200V-240V AC	100V-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	378/388m³/h	378/388m³/h	548m³/h
空气流量, 配出口过滤器、标准过滤垫	1×FK223.300: 252/270m³/h		
轴流风机	自启动罩极电机		
额定电流	0.35A/0.32A	0.60A/0.58A	2.0A
功率	45/42W	45/42W	48W
噪音水平	60dB(A)	60dB(A)	62dB(A)
过滤器工作范围	-30°C ~ +70°C	-30°C ~ +70°C	-30°C ~ +70°C
出口过滤器型号	FK223.300	FK223.300	FK223.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		


 全新设计的固定架
更好的 IP 等级

 易开式结构,
滤垫维护更快捷


通过螺母灵活调整风扇尺寸

尺寸图(mm) 可选风扇尺寸: 172x51/172x55/180x60/205x72/Ø220x60/225x80mm

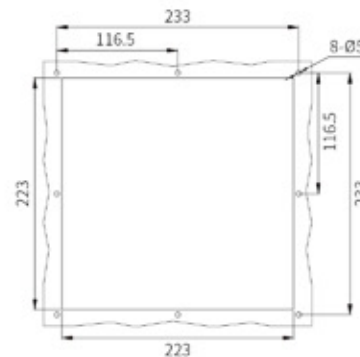



FK283-22580.230



FK283.300



IP54

CE

RoHS

-20 +65

规格

风扇过滤器型号	FK283-22580.230	FK283-22580.115
额定电压	200V-240V AC	100V-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	495/540m ³ /h	498/540m ³ /h
空气流量, 配出口过滤器、标准过滤垫	1×FK283.300: 342/368m ³ /h	
轴流风机	电容电机	
额定电流	0.30A/0.35A	0.55A/0.65 A
功率	55/65W	55/65W
噪音水平	62/65dB(A)	62/65dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	FK283.300	FK283.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



全新设计的固定架
更好的 IP 等级



易开式结构,
滤芯维护更快捷



通过螺母灵活调整风扇尺寸

尺寸图(mm) 可选风扇尺寸: 220x60/254x89/225x80/280x80mm

