

LK6621 .230

LK6621 .300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	LK6621.230	LK6621.115	LK6621.024
额定电压	200-240V AC	100-125V AC	24V DC
额定频率	50/60 Hz	50/60 Hz	—
空气流量, 自由吹风	28/38 m³/h	28/38 m³/h	38 m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6621.300:20/25 m³/h		
轴流风机	自启动罩极电机		
额定电流	0.07A/0.06A	0.12A/0.11A	0.08A
功率	12/11W	12/11W	1.92W
噪音水平	37/41dB(A)	37/41dB(A)	41dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6621.300	LK6621.300	LK6621.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



直线格栅设计






更薄的外壳



优质密封圈

尺寸图(mm)



LK6622.230

LK6622.300



IP54

CE

RoHS

-30 ~ +70

规格

风扇过滤器型号	LK6622.230	LK6622.115	LK6622.024
额定电压	200-240V AC	100-125V AC	24V DC
额定频率	50/60 Hz	50/60 Hz	—
空气流量, 自由吹风	65/85 m³/h	65/85 m³/h	100 m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6622.300:55/70 m³/h		
轴流风机	自启动罩极电机		
额定电流	0.12A/0.11A	0.24A/0.22A	0.20A
功率	19/18W	19/18W	4.8W
噪音水平	41/42dB(A)	41/42dB(A)	41dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6622.300	LK6622.300	LK6622.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



直线格栅设计






更薄的外壳



优质密封圈

尺寸图(mm)





LK6623.230



LK6623.300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	LK6623.230	LK6623.115	LK6623.024
额定电压	200-240V AC	100-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	105/126m³/h	105/126m³/h	126m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6623.300:78/90m³/h		
轴流风机	自启动罩极电机		
额定电流	0.12A/0.11A	0.24A/0.22A	0.20A
功率	19/18W	19/18W	4.8W
噪音水平	41/42dB(A)	41/42dB(A)	41dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6623.300	LK6623.300	LK6623.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



直线格栅设计






更薄的外壳



优质密封圈

尺寸图(mm)



LK6624.230

LK6624.300



IP54

CE

RoHS

-30 ~ +70

规格

风扇过滤器型号	LK6624.230	LK6624.115	LK6624.024
额定电压	200V-240V AC	100-125V AC	24V DC
额定频率	50/60Hz	50/60Hz	—
空气流量, 自由吹风	220/240m³/h	220/240m³/h	300m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6624.300:155/185m³/h		
轴流风机	自启动罩极电机		
额定电流	0.24A/0.22A	0.45A/0.42A	0.8A
功率	38/36W	38/36W	19.2W
噪音水平	50/52dB(A)	50/52dB(A)	50dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6624.300	LK6624.300	LK6624.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)		
空气流动方向	进气口为标准配置; 排气口为可选配置		



直线格栅设计






更薄的外壳



优质密封圈

尺寸图(mm)





LK6625 .230

LK6625 .300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	LK6625.230	LK6625.115
额定电压	200V-240V AC	100-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	230/265m³/h	230/265m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6625.300:190/215m³/h	
轴流风机	电容电机	
额定电流	0.22A/0.20A	0.45A/0.50A
功率	37/35W	37/35W
噪音水平	50/52dB(A)	50/52dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70
出口过滤器型号	LK6625.300	LK6625.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



直线格栅设计







更薄的外壳



优质密封圈

尺寸图(mm)





LK6625-D.230

LK6625.300



IP54

CE

RoHS

-30 ~ +70

规格

风扇过滤器型号	LK6625-D.230	LK6625-D.115
额定电压	200V-240V AC	100-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	330/370m ³ /h	330/370m ³ /h
空气流量, 配出口过滤器、标准过滤垫	1×LK6625.300:280/300m ³ /h	
轴流风机	电容电机	
额定电流	0.35A/0.32A	0.54A/0.52A
功率	42/40W	42/40W
噪音水平	60dB(A)	60dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6625.300	LK6625.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



直线格栅设计





更薄的外壳



优质密封圈

尺寸图(mm)





LK6625-E.230



LK6625.300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	LK6625-E.230	LK6625-E.115
额定电压	200V-240V AC	100-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	420/430m³/h	420/430m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6625.300:280/300m³/h	
轴流风机	电容电机	
额定电流	0.35A/0.32A	0.60A/0.58A
功率	45/42W	45/42W
噪音水平	60dB(A)	60dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6625.300	LK6625.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



直线格栅设计




更薄的外壳



优质密封圈

尺寸图(mm)

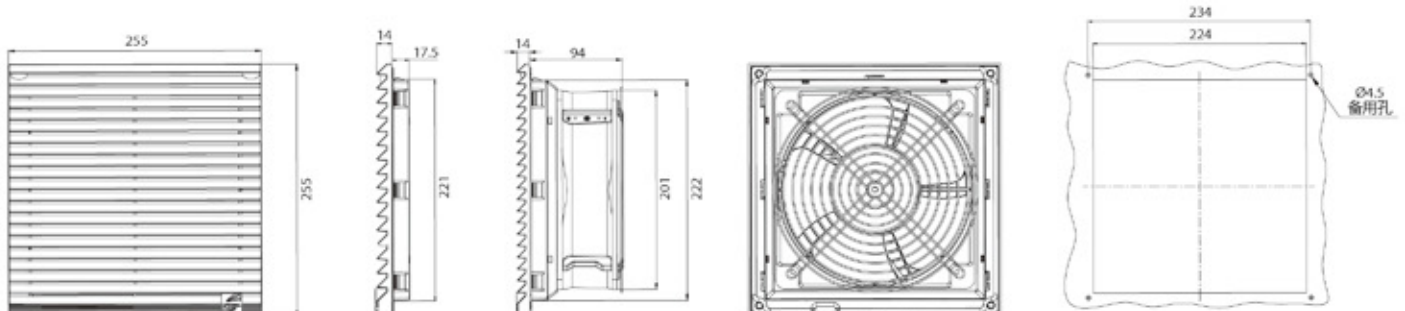



LK6625-F.230

LK6625.300



IP54

CE

RoHS

-30 ~ +70

规格

风扇过滤器型号	LK6625-F.230	LK6625-F.115
额定电压	200V-240V AC	100-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	700/750m³/h	700/750m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6625.560:600/300m³/h	
轴流风机	电容电机	
额定电流	0.30A/0.40A	0.54A/0.52A
功率	50/80W	50/80W
噪音水平	60dB(A)	60dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6625.300	LK6625.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



直线格栅设计






更薄的外壳



优质密封圈

尺寸图(mm)





LK6626.230

LK6626.300



IP54

CE

RoHS

-30 +70

规格

风扇过滤器型号	LK6626.230	LK6626.115
额定电压	200V-240V AC	100-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	550/600m³/h	550/600m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6626.300:380/410m³/h	
轴流风机	电容电机	
额定电流	0.30A/0.35A	0.55A/0.65A
功率	55/65W	55/65W
噪音水平	62/65dB(A)	62/65dB(A)
过滤器工作范围	-30°C - +70°C	-30°C - +70°C
出口过滤器型号	LK6626.300	LK6626.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



直线格栅设计







更薄的外壳



优质密封圈

尺寸图(mm)





LK6627.230

LK6626.300



IP54

CE

RoHS

-30 ~ +70

规格

风扇过滤器型号	LK6627.230	LK6627.115
额定电压	200V-240V AC	100-125V AC
额定频率	50/60Hz	50/60Hz
空气流量, 自由吹风	1150/1350m³/h	1150/1350m³/h
空气流量, 配出口过滤器、标准过滤垫	1×LK6626.300:750/950m³/h	
轴流风机	电容电机	
额定电流	0.55A/0.65A	1.0A/1.1A
功率	110/150W	110/150W
噪音水平	68/71dB(A)	68/71dB(A)
过滤器工作范围	-30°C ~ +70°C	-30°C ~ +70°C
出口过滤器型号	LK6626.300	LK6626.300
塑料标准	使用注塑热塑性塑料, 阻燃材料符合UL94 V-0自熄标准(可选)	
空气流动方向	进气口为标准配置; 排气口为可选配置	



直线格栅设计



更薄的外壳



优质密封圈

尺寸图(mm)

